





ZirChrom®

Technical  
Bulletin #220

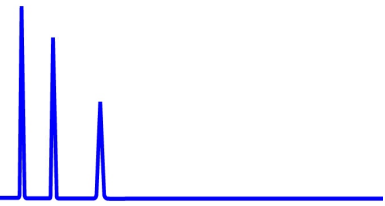

... For Peak Performance

## Fertilizer Plant Effluent Ions on ZirChrom®-SAX

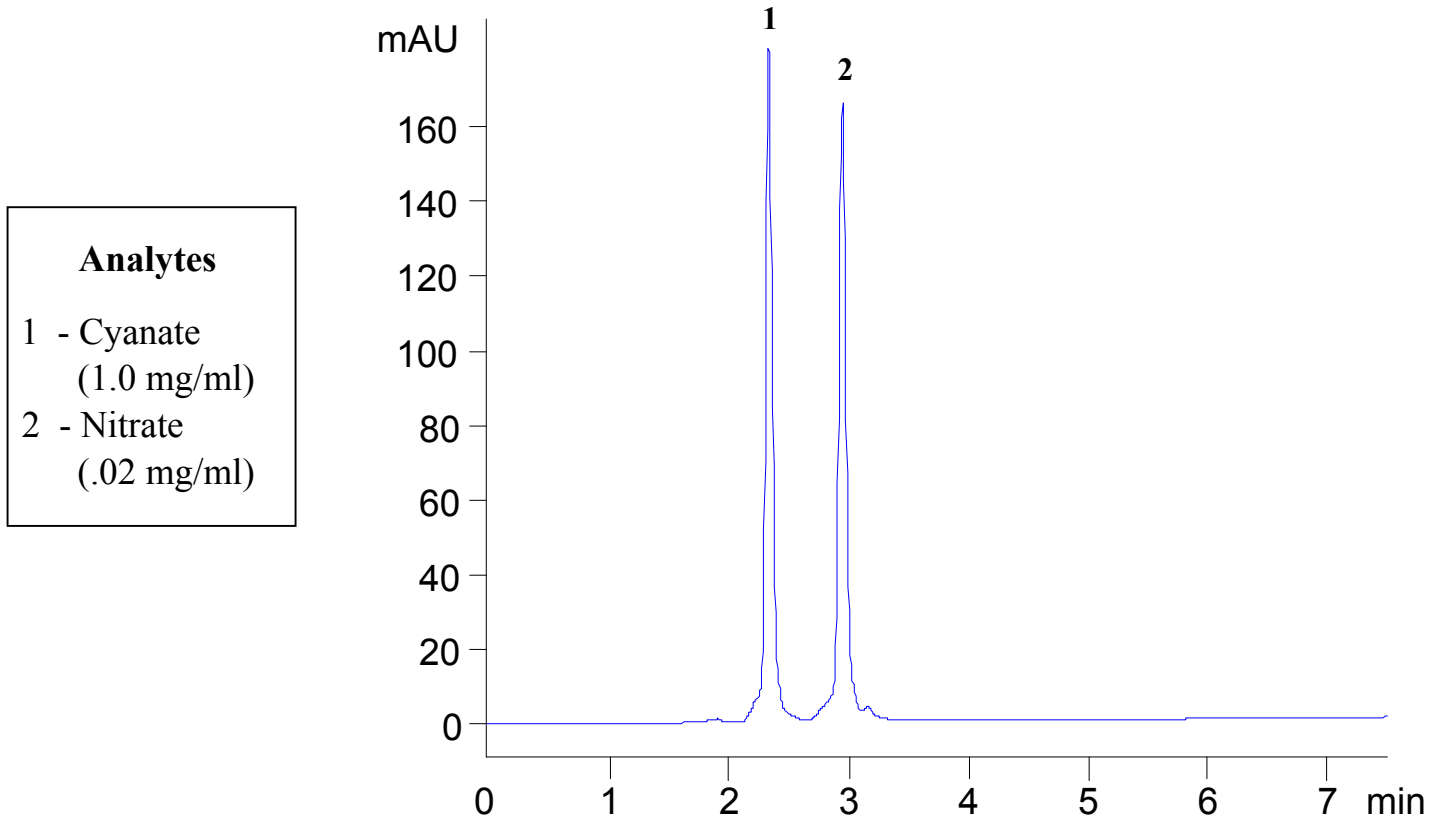

### LC Conditions

Column: ZirChrom®-SAX, 150 x 4.6 mm

Mobile Phase: 25mM sodium fluoride, 175mM  
sodium chloride at pH 10.0

Flow rate: 1.0 mL/min.

Temperature: 30°C

Detection: 205 nm

Injection Vol.: 5 ul

